

Divia

The perfect execution
of a masterpiece without
any compromise



**DIVA REDEFINES STANDARDS
IN THE INDUSTRY OF
PATIO DOORS. ITS CLASSY
APPEARANCE IS COMBINED
TO UNEQUALLED PERFORMANCE
WITH RESPECT TO ENERGY
EFFICIENCY, SOLIDITY AND
SECURITY.**




Royal Window and Door Profiles
Great Ideas Taking Shape

ROYALPLAST DIVISION

www.royalplast.ca




The Diva patio door confirms the commitment to make it an uncompromisingly superior product for either new construction or renovation projects.

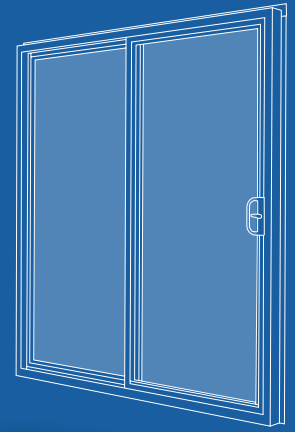

STANDARD FEATURES

- ▶ The Diva patio door has a 4 5/8" all PVC frame with integral nailing fin.
- ▶ The Diva patio door is offered standard with multipoint lock for added security.
- ▶ Sloped sill for optimal water drainage.
- ▶ The Diva patio door is suitable for new construction or remodeling.
- ▶ All sashes are fusion welded for more strength.
- ▶ Fully reversible - can be assembled to slide left or right.
- ▶ The opening sash integrates double tandem adjustable rollers for smooth and easy operation on anodized aluminum tracks.
- ▶ Full perimeter weatherstrip forms a positive seal between frame and panels.
- ▶ Multichamber insulating PVC profiles to provide maximum comfort.
- ▶ Strong interlocking meeting rail for air tightness.
- ▶ The vertical stiles are reinforced with metal.
- ▶ The sill is made of reinforced PVC for greater resistance.
- ▶ The Diva patio door uses heavy duty aluminum extrusions for screen.
- ▶ The screen can be locked from the inside.
- ▶ With or without nailing fin.

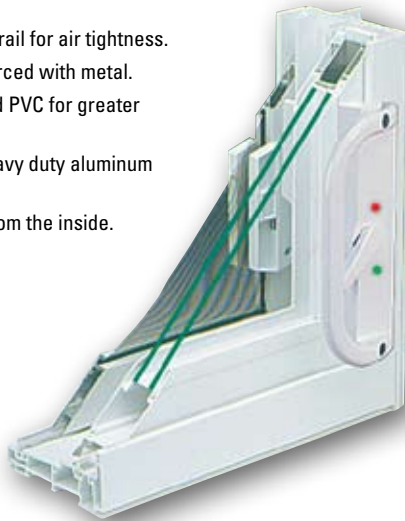

OPTIONS

- ▶ Garden door with insulated and embossed PVC panels.
- ▶ Exterior key lock.
- ▶ Security bar.
- ▶ Outside sill extension.
- ▶ Interior brass handle.
- ▶ Foot lock.
- ▶ Glazing options Low-E² with Argon Gaz and XL edge spacer, tinted, glass and grilles.
- ▶ Sidelites

COLOR OPTIONS

Blue White #141 / Cream White #151 / Tan-Beige #349.

Painted colors available using the Royal Bond™ Spectracoat™ Technology.



PERFORMANCE

	CAN	AAMA/NWWDA 101/I.S 2.97
Air tightness	A3	DP-40 Optional DP-50
Water Resistance	B4	
Wind Load Resistance	C2 (C3*)	
Forced Entry	F2	
Ease of Operation	E3	
Window Resistance	CSA	
ENERGY STAR™	A, B Zones	All Zones

* Optional: DP-50 configurations available up to 72" x 80".

STANDARD SIZES

	O X O*	O X O*	O X O*	X O X	X O X	X O X	O X X O	O X X O	O X O*	O X O*	HEIGHT
Exterior-frame Dimensions	59 1/4"	71 1/4"	95 1/4"	88 13/16"	104 13/16"	140 13/16"	116 3/4"	140 3/4"	107 3/4"	143 3/4"	79 1/2"
Minimum Rough Opening	60"	72"	96"	89 13/16"	105 9/16"	141 9/16"	117 1/2"	141 3/4"	108 1/4"	144 1/2"	80"
	WIDTH										HEIGHT

* Also available in 8/0 height (95 1/4") for the 2-panel doors Custom sizes available upon request * 9' and 12' OXO units are constituted of a standard 6' or 8' door mullied to a sidelite. X = Operating Sash O = Fixed Sash

WARRANTY RoyalPlast patio doors are delivered with a limited warranty: 20 years on PVC / 20 years on seal failure of glass / 1 year on operation.



ROYALPLAST DIVISION

LACHENAIE
1 866 777.1210
www.royalplast.ca

